

EZ SEAL

MALARKEY ROOFING PRODUCTS' EZ SEAL

Premier Liquid Membrane System

Malarkey Roofing Products' EZ Seal Resin is a superior liquid membrane system.

- EZ Seal Resin is a high performance, fast-curing methyl methacrylate resin.
- EZ Seal system bonds directly to the substrate eliminating the need for caulk and pitch pans.
- EZ Seal Resin provides a virtually maintenance free way of sealing roof penetrations.

Superior Performance

Ideal for a variety of applications, EZ Seal is cold applied and is suitable for a flat or sloped roof deck.


EZ Seal is waterproof, flexible, and self adhering; significantly outlasting and outperforming traditional flashing for roofing systems.

Please contact your roofer, local distribution center, or Malarkey Roofing Products for more details.



MALARKEY ROOFING PRODUCTS
P.O. BOX 17217
PORTLAND, OREGON 97217-7472
WWW.MALARKEYROOFING.COM
(503) 283-1191 • (800) 545-1191
FAX: (503) 289-7644

Rev. 6/11.

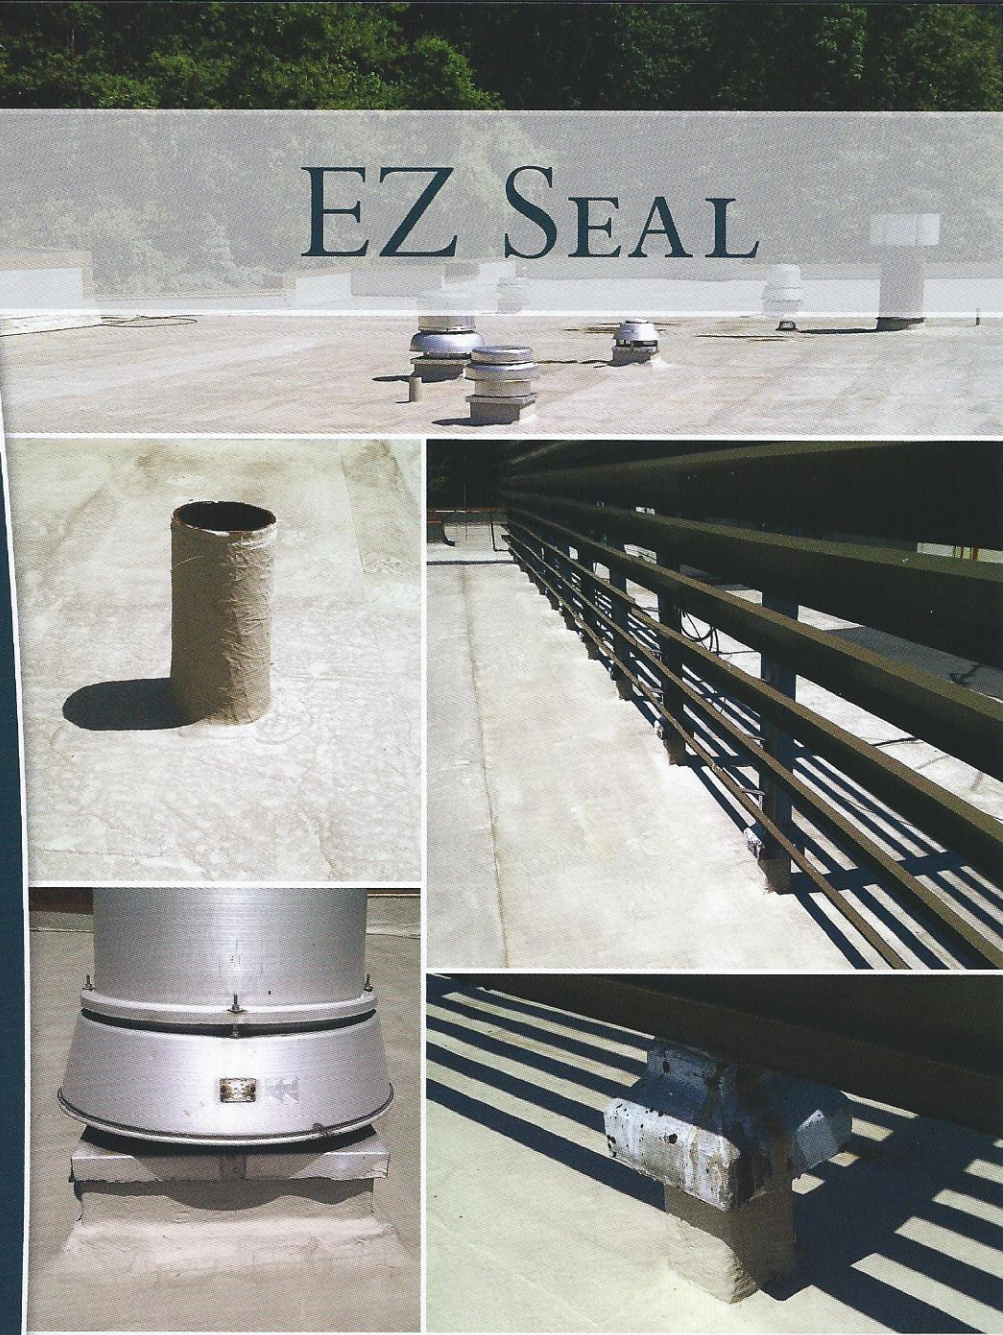

Technical Data:

Flashing Resins	Unit Size	Item #	Temperature / Catalyst Ratio			Reaction Times 68° F (20° C)
			32-41° F (0-5° C)	41-77° F (5-25° C)	77-95° F (25-35° C)	
EZ Seal Non-Fibered Resin (standard formulation)	10-kg	760	6%	4%	2%	Rainproof: 30-minutes Next Layer: 1-hour Fully Cured: 3-hours
	5-kg	765	60g/kg	40g/kg	20g/kg	
EZ Seal Non-Fibered Resin (winter formulation)	10-kg	770	4%	2%	1%	Rainproof: 30-minutes Next Layer: 1-hour Fully Cured: 3-hours
	5-kg	775	40g/kg	20g/kg	10g/kg	
EZ Seal Fibered Resin	5-kg	785	4%	2%	1%	Rainproof: 30-minutes Next Layer: 45-minutes Fully Cured: 3-hour